



TRUE RIG BRAND

IDOL_LTD - Ultralight Competition Freestyle

Light, lighter and very radical! The new IDOL_LTD is the most sophisticated, extreme freestyle production sail that we have ever built.

Key Features:

- > **01 NEW:** Ultra-light for maximum handling thanks to the trend setting high-tech yachting laminate "ODL" and 4 mil ULTRA.FILM, the lightest monofilm on the market.
- > 02 3 ultra light tube battens
- > 03 PURE.PATCH.TECHNOLOGY at the clew: luff and batten pocket ends make for 50% weight savings
- > 04 iROCKET, NorthSails lightest batten tensioner of all time

PRESS RELEASE

07/13

> **05** Exclusively designed for RDM masts

Size	4,0	4,4	4,8	5,2
Boom max (cm)	151	155	160	166
Luff max (cm)	375	395	412	434
Mast: Length¹	370	400	400	430
Mast: Geometry ²	RDM/	RDM/	RDM/	RDM/









TRUE RIG Brand

SOUL - Wave & Style Soul Surfing

The radically different sail for chilled out Wave and stylish Soul-riders, which turns even lousy conditions into a super session! SUP-compatible!

Key Features:

- > 01 Max. planing power thanks to tight leech
- > 02 Very luffable due to elastic dacron luff panel
- > 03 Further draft back position for adjustable power through backhand

PRESS RELEASE

07/13

- > **04** Extremely sturdy, unbreakable epoxy battens
- > 05 Top performance on RDM and SDM masts

Size	4,8	5,2	5,7	6,4	
	Wave	Wave	Wave	Style	
Boom max (cm)	173	178	185	194	
Luff max (cm)	417	434	446	472	
Mast: Length ¹	400	430	430	460	
Mast: Geometry ²	RDM/SDM	RDM/SDM	RDM/SDM	SDM/	





C 01







IDOL – Competition Freestyle-Wave

Key Features:

> 01 NEW: Stabilized top construction for reduced top flattering

PRESS RELEASE

> 02 NEW: Extremely sturdy, unbreakable epoxy battens

07/13

- > 03 PURE.PATCH.TECHNOLOGY at the clew: luff and batten pocket ends make for 50% weight savings
- > **04** BALANCED.LUFF.LENGTH luff as short as possible for radical handling and as long as necessary for maximum wind range
- > 05 STRAIGHT.FOOT.DESIGN and forward draft for increased lift with leeward maneuvers
- > 06 iROCKET, the lightest of all times NorthSails batten tension
- > **07** Exclusively designed for RDM masts

Size	4,0	4,2	4,5	4,7	5,0	5,3	5,6	5,9
Boom max (cm)	146	152	156	162	169	173	176	181
Luff max (cm)	382	390	401	407	422	443	451	459
Mast: Length ¹	370/400	370/400	400/370	400/370	400	430/400	430	430
Mast: Geometry ²	RDM/-	RDM/	RDM/-	RDM/	RDM/	RDM/-	RDM/	RDM/-









VOLT – Wave - Freetsyle

Key Features:

> 01 NEW: Extremely sturdy, unbreakable epoxy battens

07/13


- > 02 Extremely draft-stable due to 5-batten, draft forward design and pronounced loose leech
- > 03 PURE.PATCH.TECHNOLOGY at the clew: luff and batten pocket ends make for 50% weight savings
- > 04 iBUMPER, the most advanced and effective molded mast protector

PRESS RELEASE

- > 05 Designed to work on RDM masts but still fully compatible with our SDM masts
- > 06 MINIMUM.MAST.CONCEPT: one mast fits all sizes(400-19)

1	TT
	NORTH SAILS
N	S

	Size	3,4	3,7	4,0	4,2	4,5	4,7	5,0	5,3	5,9	6,4	6,9
	Boom max (cm)	141	146	153	156	161	166	172	179	181	187	191
	Luff max (cm)	358	374	386	398	406	405	416	435	449	457	494
	Mast: Length ¹	370/400	370/400	370/400	370/400	400/370	400	400	430/400	430	430	460/430+CX
М	ast: Geometry ²	RDM/SDM	SDM/RDM									

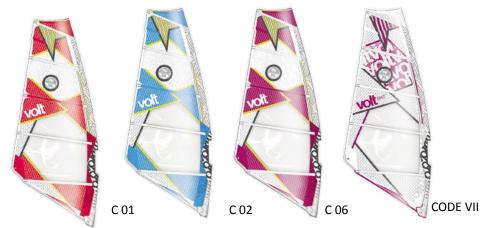





HERO – 4-Batten Wave

Key Features:

- > 01 NEW: Complete fine-tuning of all sizes for improved performance and balanced handling
- > 02 NEW: Extremely sturdy, unbreakable epoxy battens
- > 03 PURE.PATCH.TECHNOLOGY at the clew: luff and batten pocket ends make for 50% weight savings
- > 04 iBUMPER, the most advanced and effective molded mast protector

PRESS RELEASE

07/13

- > 05 BALANCED.LUFF.LENGTH as short as possible for most radical throw-ability and as long as necessary for maximum wind range
- > **06** Exclusively designed for RDM masts

IT
NORTH SAILS
3

,0 3,4	3,7	4,0	4,2	4,5	4,7	5,0	5,3	5,6
40 143	143	148	153	157	162	168	172	177
51 361	371	380	389	399	404	418	441	449
70 370	0/400 370/40	0 370/400	370/400	400/370	400/370	400	430/400	430
DM/- RD	M/- RDM/	RDM/-	RDM/	RDM/-	RDM/	RDM/-	RDM/	RDM/-
	,0 3,4 40 143 51 361 70 370	,0 3,4 3,7 40 143 143 51 361 371 70 370/400 370/40	,0 3,4 3,7 4,0 40 143 143 148 51 361 371 380 70 370/400 370/400 370/400	,0 3,4 3,7 4,0 4,2 40 143 143 148 153 51 361 371 380 389 70 370/400 370/400 370/400	,0 3,4 3,7 4,0 4,2 4,5 40 143 143 148 153 157 51 361 371 380 389 399 70 370/400 370/400 370/400 400/370	,0 3,4 3,7 4,0 4,2 4,5 4,7 40 143 143 148 153 157 162 51 361 371 380 389 399 404 70 370/400 370/400 370/400 400/370 400/370	40 3,4 3,7 4,0 4,2 4,5 4,7 5,0 40 143 143 148 153 157 162 168 51 361 371 380 389 399 404 418 70 370/400 370/400 370/400 400/370 400/370 400	40 3,4 3,7 4,0 4,2 4,5 4,7 5,0 5,3 40 143 143 148 153 157 162 168 172 51 361 371 380 389 399 404 418 441 70 370/400 370/400 370/400 400/370 400 400/370



CODE VII